




SUMMARY

Power Consumption	100W
Beam / Field Angle	13° / 25°
Peak Lumens	3256
Peak CRI	92
Hours of LED Lifespan	60,000

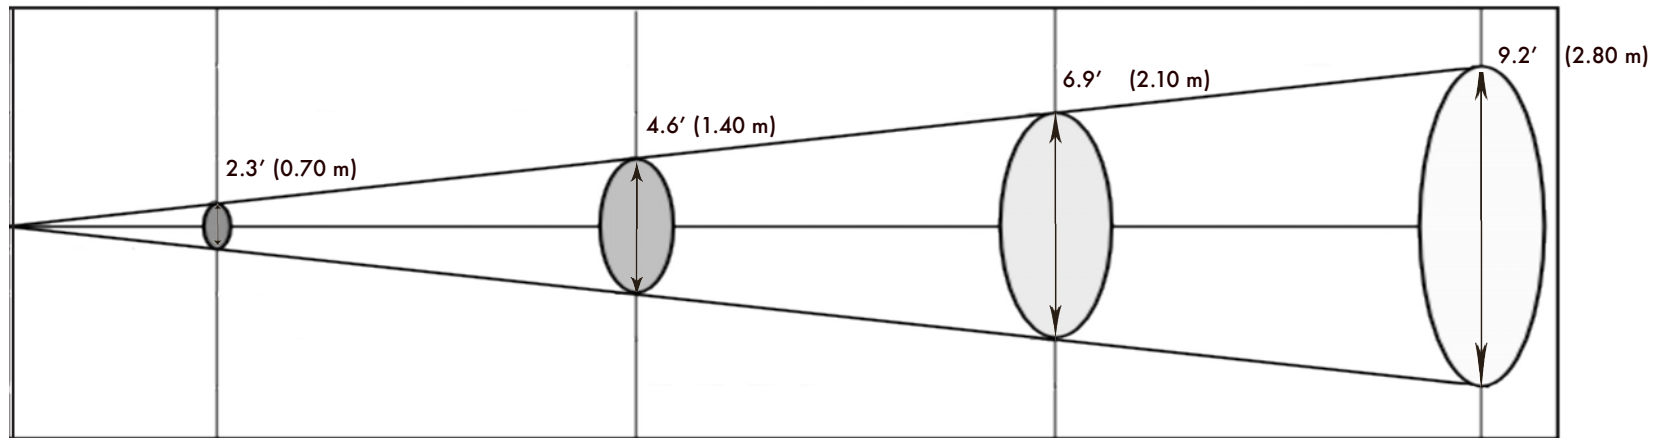

	10' (3.05 m)		20' (6.10 m)		30' (9.14 m)		40' (12.19 m)	
ILLUMINANCE*	lux	fc	lux	fc	lux	fc	lux	fc
2800K	3134	291	768	71	340	32	190	18
3200K	3829	356	934	87	412	38	232	22
3500K	4477	416	1086	101	482	48	270	25
4000K	4796	446	1150	107	511	47	286	27
5000K	5167	480	1217	113	551	51	302	28
6000K	4482	417	1041	97	476	44	263	24

LSD DIFFUSER COMPARISON

	No diffuser	Narrow	Medium	Wide
Beam / Field Angle	13° / 25°	16° / 32°	21° / 41°	35° / 54°

* Illuminance data measured with a Konica Minolta CL-200A Chroma Meter

